












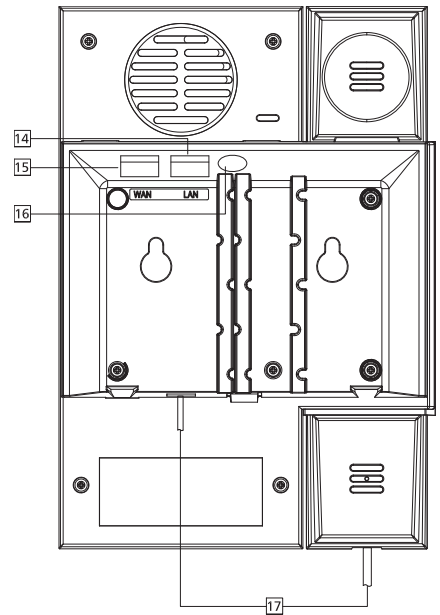
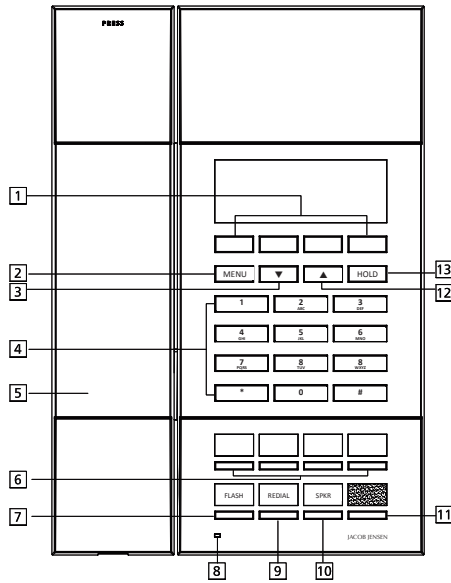
Shandong Bittel Intelligent Technology Co., Ltd.
 No. 1 Rizhao North Road, Rizhao,
 Shandong, 276800, China
www.bittelgroup.com,
www.hotelphone.com info@bittelgroup.com

- Features:**
- IP60W F is 1 Line Corded VOIP with Display.
 - Supports SIP V2/SDP/RTP/RTCP/STUN/SNTP/ DNS/SNMPv2 protocols.
 - Supports IEEE802.1 Q standard, IEEE802.3af protocols.
 - Supports G.711/G.722(HD Voice)/G.723/G.729AB /G.726/iLBC.
 - Hold, Flash, Redial and and Speaker feature
 - Message waiting light compatible with main PBX, MWL indicator and withdraw feature.
 - Owns Four (4) service keys and Four (4) soft keys
 - Supports DHCP and static IP address protocol for getting IP address.
 - Supports upgrade through HTTP/TFTP protocol.
 - Adopts dynamic speech detection; Comfortable noise generation; Speech buffering technologies.
 - Integrated PoE power supply and external POE adapter power supply.

CONTROLS AND FUNCTIONAL KEYS

Features Description of the functional keys

-  **HOLD** Places the call on hold
-  **MUTE** Microphone switch (handset)
-  **FLASH** Flash button
-  **MWI** – Message Waiting Indicator
-  To lower or increase the speaker and handset volume
-  **REDIAL/PG** Redial button / Page Handset
-  For on hook dialling (speaker phone mode)
-  Key for special services
-  Key for special services



Colour scheme – front plates



Base unit – front

- 1. Soft Keys
- 2. MENU Key
- 3. ▼ Key
- 4. Number Keys
- 5. Handset
- 6. Service keys
- 7. FLASH Key

- 8. Indicator Light
- 9. REDIAL Key
- 10. Speaker
- 11. MWL
- 12. ▲ Key
- 13. HOLD Key

Base unit – rear

- 14. LAN Port
- 15. WAN Port
- 16. DC Jack
- 17. Handset Cord

Material:	ABS, PMMA
Colours	Anthracite with coloured plates: white, silver, black, gold, red or blue
Approved standards:	EN 55022 and EN 55024